
CECGLB-1000IG-T.6

1000 Gallon Globe Trickle Tank **Product Specifications**





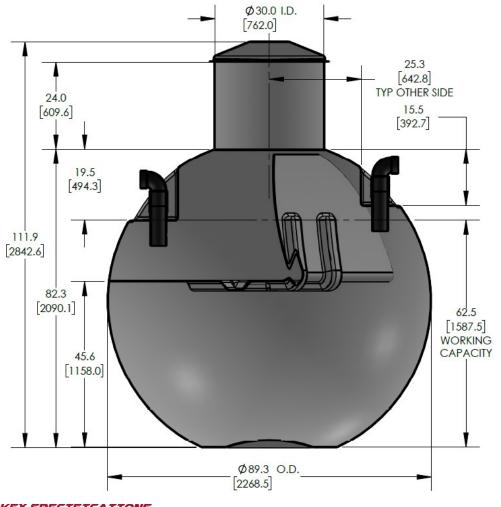

FEATURES AND BENEFITS

CSA certified design and construction

Corrosion resistant

100% neat resin construction


Virtually maintenance-free

External gelcoat for increased protection

30" wide easy-access manway

Includes 4" standard ABS inlet

Standard 10-year limited warranty





AVAILABLE OPTIONS

Manway extensions
Lockable manway cover
Hinged manway cover
Polylok effluent filter
Double-walled construction

Insulated or heat-traced

NSF potable water lining

• Additional fittings & connections

KEY SPECIFICATIONS

Nominal volume	1,000 imp. gallons	4,546 litres
Septic volume	924 imp. gallons	4,200 litres
Effluent volume	181 imp. gallons	822 litres
Outer diameter	89.3 in	2,269 mm
Approx. weight	349 lbs	158 kg

The CECGLB-1000IG-T.6 product is a CSA-approved 1000 imp. gallon fiberglass globe trickle tank designed for burial depths up to 0.6m (2ft). The lightweight fiberglass construction provides a durable, corrosion-resistant, and high-strength structure that requires virtually zero-maintenance.

MARKETS & APPLICATIONS









Full customization & engineering

RESIDENTIAL