


CECGLB-750IG-P3.05

750 Gallon Globe Pump Out Tank Product Specifications



**ENGINEERED
COMPOSITES**

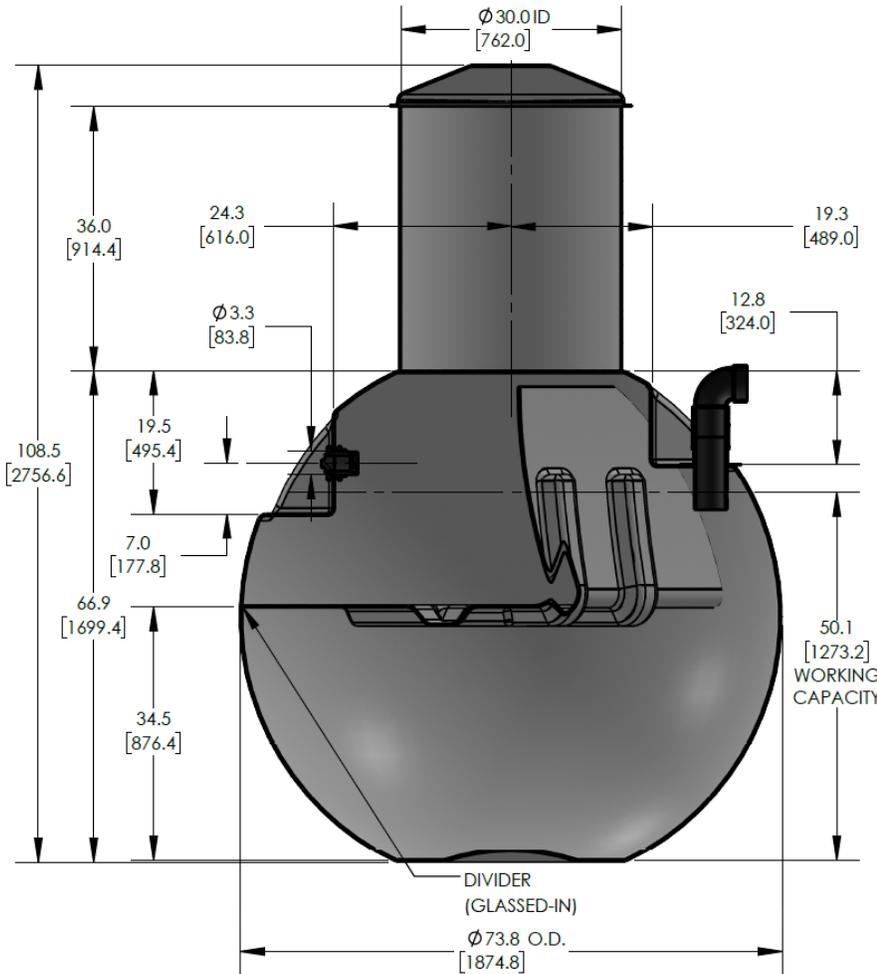

FEATURES AND BENEFITS

CSA certified design and construction

Corrosion resistant

100% neat resin construction


Virtually maintenance-free

External gelcoat for increased protection

30" wide easy-access manway

Includes 4" standard ABS inlet

Standard 10-year limited warranty

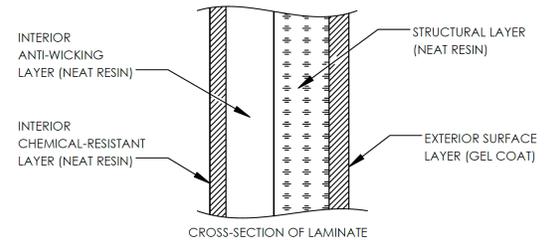

KEY SPECIFICATIONS

Nominal volume	750 imp. gallons	3,410 litres
Septic volume	488 imp. gallons	2,219 litres
Effluent volume	117 imp. gallons	532 litres
Outer diameter	73.7 in	1,872 mm
Approx. weight	320 lbs	145 kg

The CECGLB-750IG-P3.05 product is a CSA-approved 750 imp. gallon fiberglass globe pump out tank designed for burial depths of up to 3.05m (10ft). The light-weight fiberglass construction provides a durable, corrosion-resistant, and high-strength structure that requires virtually zero-maintenance.

MARKETS & APPLICATIONS



RESIDENTIAL



COMMERCIAL



AGRICULTURAL



MINING

AVAILABLE OPTIONS

- Additional fittings & connections
- Manway extensions
- Lockable manway cover
- Hinged manway cover
- Polylok effluent filter
- Double-walled construction
- Insulated or heat-traced
- NSF potable water lining
- Full customization & engineering

WWW.CARLSONCOMPOSITES.COM

PHONE: 1.204.233.0671

FAX: 1.204.233.6938

EMAIL: info@carlsoncomposites.com