

FEATURES AND BENEFITS

CSA certified design and construction

- Corrosion resistant
- 100% neat resin construction
- Virtually maintenance-free

External gelcoat for increased protection

30" wide easy-access manway

Includes standard bulkhead outlet drain

Standard 10-year limited warranty

KEY SPECIFICATIONS


Nominal volume

Septic volume

Effluent volume

Overall length

Approx. weight

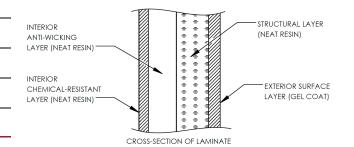

structure that requires virtually zero-maintenance.

AVAILABLE OPTIONS

- Additional fittings & connections •
- Manway extensions
- Lockable manway cover
- Hinged manway cover
- Polylok effluent filter
- Double-walled construction •
- Insulated or heat-traced
- ٠ NSF potable water lining
- Full customization & engineering

MARKETS & APPLICATIONS





COMMERCIAL

17,500 imp. gallons

17,501 imp. gallons

496.8 in

4,724 lbs



79,557 litres

79,561 litres

12,619 mm

2,143 kg

17500 imp. gallon fiberglass pill-style holding tank designed for burial

depths up to 3.05m (10ft). The lightweight filament wound fiberglass construction provides a durable, corrosion-resistant, and high-strength

AGRICULTURAL



WWW.CARLSONCOMPOSITES.COM