## CECPIL-17500IG-10P3.66 CARLSON ENGINEEREED COMPOSITES 17500 Gallon Pill Style Pumpout Tank **Product Specifications** 202.5 5143.5 90.0 LIFTING-LUG 6.0 Ø30.01.D [2286.0] 152.4 (GLASSED-IN) 762.0 69.8 TYP 9.0 2 PLCS TYP [228.6] 25.3 641.4 PENETRATION 100.5 120.6 Ø126.1 [2552.7] [3063.7] [3203.3] 134.7 [3420.9] ORKING CAPACITY 60.0 [1524.0] FIBREGLASS 18.0 D-RIN G [457.2] (GLASSED-IN) DIVIDER TYP (GLASSED-IN) 2 PLCS 497 0 [12624.8]

## FEATURES AND BENEFITS

CSA certified design and construction

Corrosion resistant

100% neat resin construction

Virtually maintenance-free

External gelcoat for increased protection

30" wide easy-access manway

Includes 4" standard outlet

Standard 10-year limited warranty

## KEY SPECIFICATIONS

Nominal volume


Septic volume

**Effluent volume** 

**Overall length** 

Approx. weight

The CECPIL-17500IG-10P3.66 product is an 10-ft diameter CSA-certified 17500 imp. gallon fiberglass pill-style pumpout tank designed for burial depths up to 3.66m (12ft). The lightweight filament wound fiberglass construction provides a durable, corrosion-resistant, and high-strength structure that requires virtually zero-maintenance.

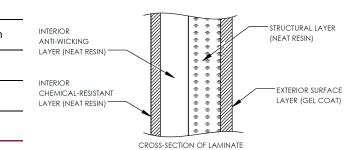

- Additional fittings & connections
- Manway extensions
- Lockable manway cover
- Hinged manway cover
- Polylok effluent filter
- Double-walled construction
- Insulated or heat-traced
- NSF potable water lining
- Full customization & engineering

## MARKETS & APPLICATIONS





COMMERCIAL

17,500 imp. gallons

16,134 imp. gallons

1,366 imp. gallons

497.0 in

6,051 lbs



AGRICULTURAL

79,557 litres

73,347 litres

6,210 litres

12,624 mm

2,745 kg



*WWW.CARLSONCOMPOSITES.COM* FAX: 1.204.233.6938

EMAIL: info@carlsoncomposites.com