






**ENGINEERED  
COMPOSITES**

**10-FT DIAMETER  
UNDERGROUND TANKS**

Carlson's lineup of CSA-certified 10-ft (2.44m) diameter underground tanks are versatile tanks available in a variety of styles such as holding, pump-out, or water. All tanks come with an easy-access 30" diameter manway & lid. All 10-ft tanks are filament wound construction for improved structural strength. The 10-ft tanks are available in 2' (0.6m), 7' (2.14m), 10' (3.05m), and 12' (3.66m) burial depths.

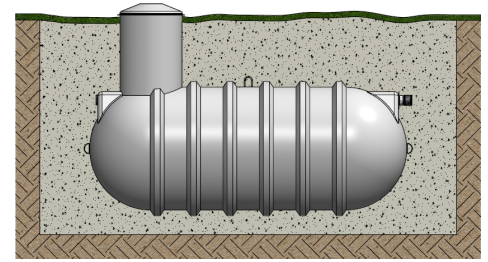

**SHALLOW BURIAL - 2FT (0.6M) BURIAL**

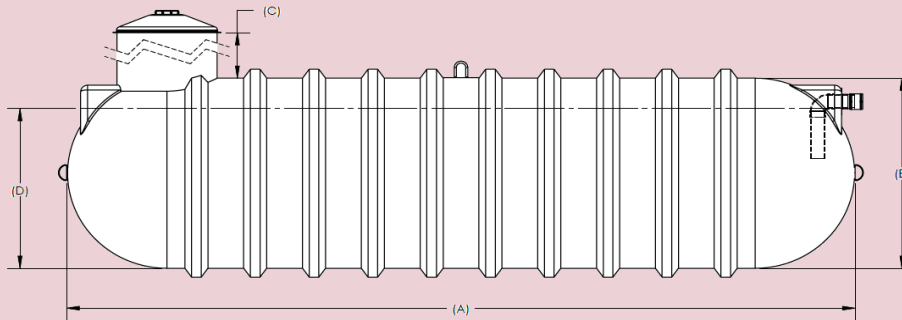

MODEL	TANK STYLE	MANWAY HEIGHT (C)	APPROX. WEIGHT	NOMINAL VOLUME	SEPTIC VOLUME	EFFLUENT VOLUME	TOTAL LENGTH (A)	DIAMETER (B)	MAX. LIQUID LEVEL (D)
		IN (MM)	LBS (KG)	IMP. GAL (L)	IMP. GAL (L)	IMP. GAL (L)	IN (MM)	IN (MM)	IN (MM)
CECPIL-7000IG-10H.6	Holding	6 (152)	1482 (672)	7000 (31823)	7000 (31823)	-	208.1 (5286)	120 (3048)	100.5 (2553)
CECPIL-7000IG-10P.6	Pump Out		1614 (732)		5615 (25526)	1385 (6296)			
CECPIL-7500IG-10H.6	Holding	6 (152)	1586 (719)	7500 (34088)	7000 (31823)	-	219.6 (5578)	120 (3048)	100.5 (2553)
CECPIL-7500IG-10P.6	Pump Out		1718 (779)		5615 (25526)	1385 (6296)			
CECPIL-8000IG-10H.6	Holding	6 (152)	1641 (744)	8000 (36370)	7000 (31823)	-	235.6 (5984)	120 (3048)	100.5 (2553)
CECPIL-8000IG-10P.6	Pump Out		1773 (804)		5615 (25526)	1385 (6296)			
CECPIL-9000IG-10H.6	Holding	6 (152)	1802 (817)	9000 (40915)	7000 (31823)	-	262.7 (6673)	120 (3048)	100.5 (2553)
CECPIL-9000IG-10P.6	Pump Out		1933 (877)		5615 (25526)	1385 (6296)			
CECPIL-10000IG-10H.6	Holding	6 (152)	1897 (860)	10000 (45460)	7000 (31823)	-	289.7 (7358)	120 (3048)	100.5 (2553)
CECPIL-10000IG-10P.6	Pump Out		2029 (920)		5615 (25526)	1385 (6296)			
CECPIL-11000IG-10H.6	Holding	6 (152)	2055 (932)	11000 (50000)	7000 (31823)	-	317.2 (8057)	120 (3048)	100.5 (2553)
CECPIL-11000IG-10P.6	Pump Out		2188 (992)		5615 (25526)	1385 (6296)			
CECPIL-12000IG-10H.6	Holding	6 (152)	2214 (1004)	12000 (54550)	7000 (31823)	-	344.7 (8755)	120 (3048)	100.5 (2553)
CECPIL-12000IG-10P.6	Pump Out		2347 (1065)		5615 (25526)	1385 (6296)			
CECPIL-12500IG-10H.6	Holding	6 (152)	2265 (1027)	12500 (56826)	7000 (31823)	-	358.7 (9111)	120 (3048)	100.5 (2553)
CECPIL-12500IG-10P.6	Pump Out		2397 (1087)		5615 (25526)	1385 (6296)			
CECPIL-13000IG-10H.6	Holding	6 (152)	2376 (1078)	13000 (59099)	7000 (31823)	-	372.7 (9467)	120 (3048)	100.5 (2553)
CECPIL-13000IG-10P.6	Pump Out		2509 (1138)		5615 (25526)	1385 (6296)			
CECPIL-14000IG-10H.6	Holding	6 (152)	2535 (1150)	14000 (63645)	7000 (31823)	-	399.7 (10152)	120 (3048)	100.5 (2553)
CECPIL-14000IG-10P.6	Pump Out		2668 (1210)		5615 (25526)	1385 (6296)			
CECPIL-15000IG-10H.6	Holding	6 (152)	2643 (1199)	15000 (68191)	7000 (31823)	-	427.2 (10851)	120 (3048)	100.5 (2553)
CECPIL-15000IG-10P.6	Pump Out		2775 (1259)		5615 (25526)	1385 (6296)			
CECPIL-17500IG-10H.6	Holding	6 (152)	3010 (1365)	17500 (79557)	7000 (31823)	-	495.7 (12591)	120 (3048)	100.5 (2553)
CECPIL-17500IG-10P.6	Pump Out		3142 (1425)		5615 (25526)	1385 (6296)			
CECPIL-20000IG-10H.6	Holding	6 (152)	3376 (1531)	20000 (90922)	7000 (31823)	-	564.2 (14331)	120 (3048)	100.5 (2553)
CECPIL-20000IG-10P.6	Pump Out		3509 (1592)		5615 (25526)	1385 (6296)			
CECPIL-22500IG-10H.6	Holding	6 (152)	3743 (1698)	22500 (102287)	7000 (31823)	-	633.5 (16091)	120 (3048)	100.5 (2553)
CECPIL-22500IG-10P.6	Pump Out		3876 (1758)		5615 (25526)	1385 (6296)			
CECPIL-25000IG-10H.6	Holding	6 (152)	4110 (1864)	25000 (113652)	7000 (31823)	-	701.2 (17810)	120 (3048)	100.5 (2553)
CECPIL-25000IG-10P.6	Pump Out		4243 (1925)		5615 (25526)	1385 (6296)			


All of our 10-ft tanks are also available as a water tank as well. Please contact us or access our website for details.





**ENGINEERED  
COMPOSITES**

**10-FT DIAMETER  
UNDERGROUND TANKS**

Carlson's lineup of CSA-certified 10-ft (2.44m) diameter underground tanks are versatile tanks available in a variety of styles such as holding, pump-out, or water. All tanks come with an easy-access 30" diameter manway & lid. All 10-ft tanks are filament wound construction for improved structural strength. The 10-ft tanks are available in 2' (0.6m), 7' (2.14m), 10' (3.05m), and 12' (3.66m) burial depths.

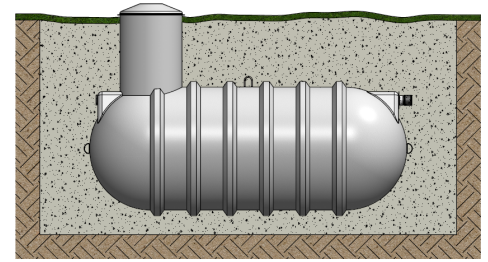

**DEEP BURIAL - 7FT (2.14M) BURIAL**

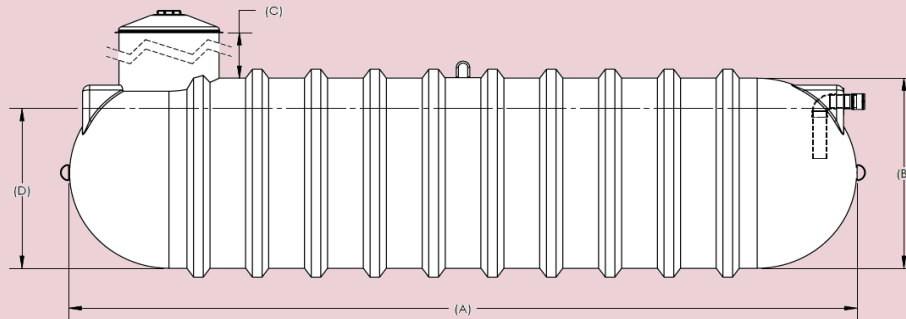

MODEL	TANK STYLE	MANWAY HEIGHT (C)	APPROX. WEIGHT	NOMINAL VOLUME	SEPTIC VOLUME	EFFLUENT VOLUME	TOTAL LENGTH (A)	DIAMETER (B)	MAX. LIQUID LEVEL (D)
		IN (MM)	LBS (KG)	IMP. GAL (L)	IMP. GAL (L)	IMP. GAL (L)	IN (MM)	IN (MM)	IN (MM)
CECPIL-7000IG-10H2.14	Holding	6 (152)	2276 (1032)	7000 (31823)	7000 (31823)	-	208.5 (5296)	120 (3048)	100.5 (2553)
CECPIL-7000IG-10P2.14	Pump Out		2408 (1092)		5615 (25526)	1385 (6296)			
CECPIL-7500IG-10H2.14	Holding	6 (152)	2394 (1086)	7500 (34088)	7000 (31823)	-	220.0 (5588)	120 (3048)	100.5 (2553)
CECPIL-7500IG-10P2.14	Pump Out		2537 (1151)		5615 (25526)	1385 (6296)			
CECPIL-8000IG-10H2.14	Holding	6 (152)	2458 (1115)	8000 (36370)	7000 (31823)	-	236.0 (5994)	120 (3048)	100.5 (2553)
CECPIL-8000IG-10P2.14	Pump Out		2590 (1175)		5615 (25526)	1385 (6296)			
CECPIL-9000IG-10H2.14	Holding	6 (152)	2645 (1200)	9000 (40915)	7000 (31823)	-	263.5 (6693)	120 (3048)	100.5 (2553)
CECPIL-9000IG-10P2.14	Pump Out		2777 (1260)		5615 (25526)	1385 (6296)			
CECPIL-10000IG-10H2.14	Holding	6 (152)	2757 (1251)	10000 (45460)	7000 (31823)	-	290.5 (7379)	120 (3048)	100.5 (2553)
CECPIL-10000IG-10P2.14	Pump Out		2888 (1310)		5615 (25526)	1385 (6296)			
CECPIL-11000IG-10H2.14	Holding	6 (152)	2942 (1334)	11000 (50000)	7000 (31823)	-	318.0 (8077)	120 (3048)	100.5 (2553)
CECPIL-11000IG-10P2.14	Pump Out		3075 (1395)		5615 (25526)	1385 (6296)			
CECPIL-12000IG-10H2.14	Holding	6 (152)	3128 (1419)	12000 (54550)	7000 (31823)	-	345.5 (8776)	120 (3048)	100.5 (2553)
CECPIL-12000IG-10P2.14	Pump Out		3260 (1479)		5615 (25526)	1385 (6296)			
CECPIL-12500IG-10H2.14	Holding	6 (152)	3186 (1445)	12500 (56826)	7000 (31823)	-	359.5 (9131)	120 (3048)	100.5 (2553)
CECPIL-12500IG-10P2.14	Pump Out		3319 (1505)		5615 (25526)	1385 (6296)			
CECPIL-13000IG-10H2.14	Holding	6 (152)	3317 (1505)	13000 (59099)	7000 (31823)	-	373.5 (9487)	120 (3048)	100.5 (2553)
CECPIL-13000IG-10P2.14	Pump Out		3449 (1564)		5615 (25526)	1385 (6296)			
CECPIL-14000IG-10H2.14	Holding	6 (152)	3504 (1589)	14000 (63645)	7000 (31823)	-	400.5 (10173)	120 (3048)	100.5 (2553)
CECPIL-14000IG-10P2.14	Pump Out		3635 (1649)		5615 (25526)	1385 (6296)			
CECPIL-15000IG-10H2.14	Holding	6 (152)	3626 (1645)	15000 (68191)	7000 (31823)	-	428.0 (10871)	120 (3048)	100.5 (2553)
CECPIL-15000IG-10P2.14	Pump Out		3758 (1705)		5615 (25526)	1385 (6296)			
CECPIL-17500IG-10H2.14	Holding	6 (152)	4054 (1839)	17500 (79557)	7000 (31823)	-	496.5 (12611)	120 (3048)	100.5 (2553)
CECPIL-17500IG-10P2.14	Pump Out		4186 (1899)		5615 (25526)	1385 (6296)			
CECPIL-20000IG-10H2.14	Holding	6 (152)	4482 (2033)	20000 (90922)	7000 (31823)	-	565.0 (14351)	120 (3048)	100.5 (2553)
CECPIL-20000IG-10P2.14	Pump Out		4614 (2093)		5615 (25526)	1385 (6296)			
CECPIL-22500IG-10H2.14	Holding	6 (152)	4912 (2228)	22500 (102287)	7000 (31823)	-	633.5 (16091)	120 (3048)	100.5 (2553)
CECPIL-22500IG-10P2.14	Pump Out		5043 (2287)		5615 (25526)	1385 (6296)			
CECPIL-25000IG-10H2.14	Holding	6 (152)	5339 (2422)	25000 (113652)	7000 (31823)	-	702.0 (17831)	120 (3048)	100.5 (2553)
CECPIL-25000IG-10P2.14	Pump Out		5471 (2482)		5615 (25526)	1385 (6296)			


All of our 10-ft tanks are also available as a water tank as well. Please contact us or access our website for details.





**ENGINEERED  
COMPOSITES**

**10-FT DIAMETER  
UNDERGROUND TANKS**

Carlson's lineup of CSA-certified 10-ft (2.44m) diameter underground tanks are versatile tanks available in a variety of styles such as holding, pump-out, or water. All tanks come with an easy-access 30" diameter manway & lid. All 10-ft tanks are filament wound construction for improved structural strength. The 10-ft tanks are available in 2' (0.6m), 7' (2.14m), 10' (3.05m), and 12' (3.66m) burial depths.

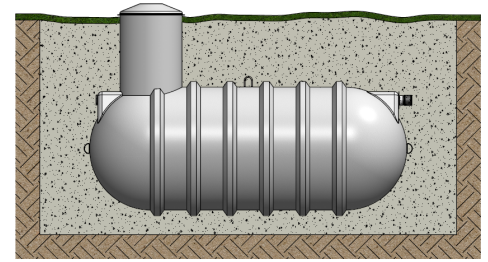

**EXTRA DEEP BURIAL - 10FT (3.05M) BURIAL**

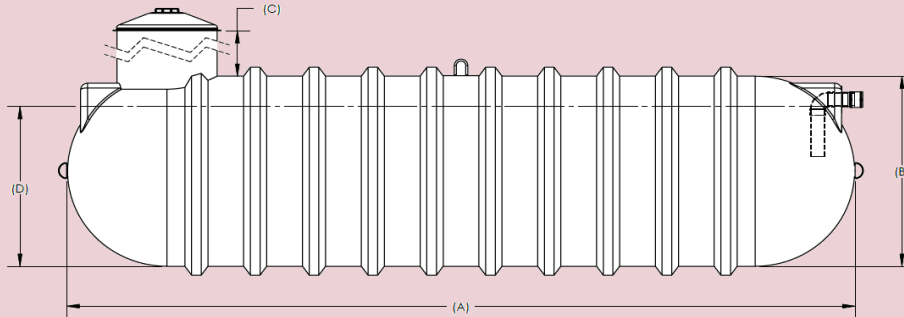

MODEL	TANK STYLE	MANWAY HEIGHT (C)	APPROX. WEIGHT	NOMINAL VOLUME	SEPTIC VOLUME	EFFLUENT VOLUME	TOTAL LENGTH (A)	DIAMETER (B)	MAX. LIQUID LEVEL (D)
		IN (MM)	LBS (KG)	IMP. GAL (L)	IMP. GAL (L)	IMP. GAL (L)	IN (MM)	IN (MM)	IN (MM)
CECPIL-7000IG-10H3.05	Holding	6 (152)	2684 (1217)	7000 (31823)	7000 (31823)	-	208.6 (5298)	120 (3048)	100.5 (2553)
CECPIL-7000IG-10P3.05	Pump Out		2815 (1277)		5615 (25526)	1385 (6296)			
CECPIL-7500IG-10H3.05	Holding	6 (152)	2819 (1279)	7500 (34088)	7000 (31823)	-	220.1 (5591)	120 (3048)	100.5 (2553)
CECPIL-7500IG-10P3.05	Pump Out		2951 (1339)		5615 (25526)	1385 (6296)			
CECPIL-8000IG-10H3.05	Holding	6 (152)	2892 (1312)	8000 (36370)	7000 (31823)	-	236.1 (5997)	120 (3048)	100.5 (2553)
CECPIL-8000IG-10P3.05	Pump Out		3024 (1372)		5615 (25526)	1385 (6296)			
CECPIL-9000IG-10H3.05	Holding	6 (152)	3108 (1410)	9000 (40915)	7000 (31823)	-	263.8 (6701)	120 (3048)	100.5 (2553)
CECPIL-9000IG-10P3.05	Pump Out		3239 (1469)		5615 (25526)	1385 (6296)			
CECPIL-10000IG-10H3.05	Holding	6 (152)	3236 (1468)	10000 (45460)	7000 (31823)	-	290.8 (7386)	120 (3048)	100.5 (2553)
CECPIL-10000IG-10P3.05	Pump Out		3367 (1527)		5615 (25526)	1385 (6296)			
CECPIL-11000IG-10H3.05	Holding	6 (152)	3448 (1564)	11000 (50000)	7000 (31823)	-	318.3 (8085)	120 (3048)	100.5 (2553)
CECPIL-11000IG-10P3.05	Pump Out		3582 (1625)		5615 (25526)	1385 (6296)			
CECPIL-12000IG-10H3.05	Holding	6 (152)	3662 (1661)	12000 (54550)	7000 (31823)	-	345.8 (8783)	120 (3048)	100.5 (2553)
CECPIL-12000IG-10P3.05	Pump Out		3794 (1721)		5615 (25526)	1385 (6296)			
CECPIL-12500IG-10H3.05	Holding	6 (152)	3729 (1691)	12500 (56826)	7000 (31823)	-	359.8 (9139)	120 (3048)	100.5 (2553)
CECPIL-12500IG-10P3.05	Pump Out		3861 (1751)		5615 (25526)	1385 (6296)			
CECPIL-13000IG-10H3.05	Holding	6 (152)	3879 (1759)	13000 (59099)	7000 (31823)	-	373.8 (9495)	120 (3048)	100.5 (2553)
CECPIL-13000IG-10P3.05	Pump Out		4011 (1819)		5615 (25526)	1385 (6296)			
CECPIL-14000IG-10H3.05	Holding	6 (152)	4093 (1857)	14000 (63645)	7000 (31823)	-	400.8 (10180)	120 (3048)	100.5 (2553)
CECPIL-14000IG-10P3.05	Pump Out		4225 (1916)		5615 (25526)	1385 (6296)			
CECPIL-15000IG-10H3.05	Holding	6 (152)	4232 (1920)	15000 (68191)	7000 (31823)	-	428.3 (10879)	120 (3048)	100.5 (2553)
CECPIL-15000IG-10P3.05	Pump Out		4365 (1980)		5615 (25526)	1385 (6296)			
CECPIL-17500IG-10H3.05	Holding	6 (152)	4724 (2143)	17500 (79557)	7000 (31823)	-	496.8 (12619)	120 (3048)	100.5 (2553)
CECPIL-17500IG-10P3.05	Pump Out		4857 (2203)		5615 (25526)	1385 (6296)			
CECPIL-20000IG-10H3.05	Holding	6 (152)	5216 (2366)	20000 (90922)	7000 (31823)	-	565.3 (14359)	120 (3048)	100.5 (2553)
CECPIL-20000IG-10P3.05	Pump Out		5349 (2426)		5615 (25526)	1385 (6296)			
CECPIL-22500IG-10H3.05	Holding	6 (152)	5709 (2590)	22500 (102287)	7000 (31823)	-	633.5 (16091)	120 (3048)	100.5 (2553)
CECPIL-22500IG-10P3.05	Pump Out		5841 (2649)		5615 (25526)	1385 (6296)			
CECPIL-25000IG-10H3.05	Holding	6 (152)	6201 (2813)	25000 (113652)	7000 (31823)	-	702.3 (17838)	120 (3048)	100.5 (2553)
CECPIL-25000IG-10P3.05	Pump Out		6334 (2873)		5615 (25526)	1385 (6296)			


All of our 10-ft tanks are also available as a water tank as well. Please contact us or access our website for details.





**ENGINEERED  
COMPOSITES**

**10-FT DIAMETER  
UNDERGROUND TANKS**

Carlson's lineup of CSA-certified 10-ft (2.44m) diameter underground tanks are versatile tanks available in a variety of styles such as holding, pump-out, or water. All tanks come with an easy-access 30" diameter manway & lid. All 10-ft tanks are filament wound construction for improved structural strength. The 10-ft tanks are available in 2' (0.6m), 7' (2.14m), 10' (3.05m), and 12' (3.66m) burial depths.

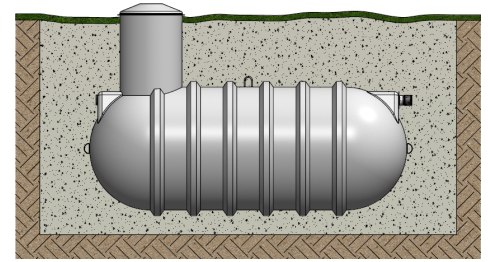

**ULTRA DEEP BURIAL - 12FT (3.66M) BURIAL**

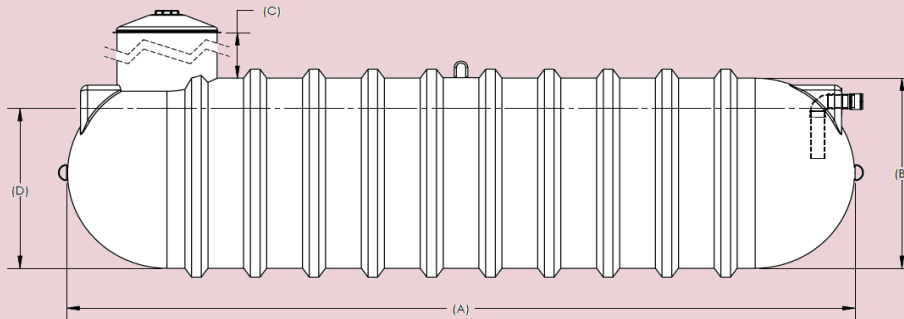

MODEL	TANK STYLE	MANWAY HEIGHT (C)	APPROX. WEIGHT	NOMINAL VOLUME	SEPTIC VOLUME	EFFLUENT VOLUME	TOTAL LENGTH (A)	DIAMETER (B)	MAX. LIQUID LEVEL (D)
		IN (MM)	LBS (KG)	IMP.GAL (L)	IMP.GAL (L)	IMP.GAL (L)	IN (MM)	IN (MM)	IN (MM)
CECPIL-7000IG-10H3.66	Holding	6 (152)	3213 (1457)	7000 (31823)	7000 (31823)	-	209.0 (5309)	120 (3048)	100.5 (2553)
CECPIL-7000IG-10P3.66	Pump Out		3345 (1517)		5615 (25526)	1385 (6296)			
CECPIL-7500IG-10H3.66	Holding	6 (152)	3395 (1540)	7500 (34088)	7000 (31823)	-	220.5 (5601)	120 (3048)	100.5 (2553)
CECPIL-7500IG-10P3.66	Pump Out		3526 (1599)		5615 (25526)	1385 (6296)			
CECPIL-8000IG-10H3.66	Holding	6 (152)	3492 (1584)	8000 (36370)	7000 (31823)	-	236.2 (5999)	120 (3048)	100.5 (2553)
CECPIL-8000IG-10P3.66	Pump Out		3623 (1643)		5615 (25526)	1385 (6296)			
CECPIL-9000IG-10H3.66	Holding	6 (152)	3778 (1714)	9000 (40915)	7000 (31823)	-	264.0 (6706)	120 (3048)	100.5 (2553)
CECPIL-9000IG-10P3.66	Pump Out		3909 (1773)		5615 (25526)	1385 (6296)			
CECPIL-10000IG-10H3.66	Holding	6 (152)	3946 (1790)	10000 (45460)	7000 (31823)	-	291.0 (7391)	120 (3048)	100.5 (2553)
CECPIL-10000IG-10P3.66	Pump Out		4078 (1850)		5615 (25526)	1385 (6296)			
CECPIL-11000IG-10H3.66	Holding	6 (152)	4229 (1918)	11000 (50000)	7000 (31823)	-	318.5 (8090)	120 (3048)	100.5 (2553)
CECPIL-11000IG-10P3.66	Pump Out		4363 (1979)		5615 (25526)	1385 (6296)			
CECPIL-12000IG-10H3.66	Holding	6 (152)	4513 (2047)	12000 (54550)	7000 (31823)	-	346.0 (8788)	120 (3048)	100.5 (2553)
CECPIL-12000IG-10P3.66	Pump Out		4645 (2107)		5615 (25526)	1385 (6296)			
CECPIL-12500IG-10H3.66	Holding	6 (152)	4602 (2087)	12500 (56826)	7000 (31823)	-	360.0 (9144)	120 (3048)	100.5 (2553)
CECPIL-12500IG-10P3.66	Pump Out		4734 (2147)		5615 (25526)	1385 (6296)			
CECPIL-13000IG-10H3.66	Holding	6 (152)	4802 (2178)	13000 (59099)	7000 (31823)	-	374.0 (9500)	120 (3048)	100.5 (2553)
CECPIL-13000IG-10P3.66	Pump Out		4934 (2238)		5615 (25526)	1385 (6296)			
CECPIL-14000IG-10H3.66	Holding	6 (152)	5087 (2307)	14000 (63645)	7000 (31823)	-	401.0 (10185)	120 (3048)	100.5 (2553)
CECPIL-14000IG-10P3.66	Pump Out		5218 (2367)		5615 (25526)	1385 (6296)			
CECPIL-15000IG-10H3.66	Holding	6 (152)	5266 (2389)	15000 (68191)	7000 (31823)	-	428.5 (10884)	120 (3048)	100.5 (2553)
CECPIL-15000IG-10P3.66	Pump Out		5398 (2448)		5615 (25526)	1385 (6296)			
CECPIL-17500IG-10H3.66	Holding	6 (152)	5919 (2685)	17500 (79557)	7000 (31823)	-	497.0 (12624)	120 (3048)	100.5 (2553)
CECPIL-17500IG-10P3.66	Pump Out		6051 (2745)		5615 (25526)	1385 (6296)			
CECPIL-20000IG-10H3.66	Holding	6 (152)	6572 (2981)	20000 (90922)	7000 (31823)	-	565.5 (14364)	120 (3048)	100.5 (2553)
CECPIL-20000IG-10P3.66	Pump Out		6704 (3041)		5615 (25526)	1385 (6296)			
CECPIL-22500IG-10H3.66	Holding	6 (152)	7227 (3278)	22500 (102287)	7000 (31823)	-	634.0 (16104)	120 (3048)	100.5 (2553)
CECPIL-22500IG-10P3.66	Pump Out		7358 (3338)		5615 (25526)	1385 (6296)			
CECPIL-25000IG-10H3.66	Holding	6 (152)	7879 (3574)	25000 (113652)	7000 (31823)	-	702.5 (17844)	120 (3048)	100.5 (2553)
CECPIL-25000IG-10P3.66	Pump Out		8011 (3634)		5615 (25526)	1385 (6296)			

All of our 10-ft tanks are also available as a water tank as well. Please contact us or access our website for details.