
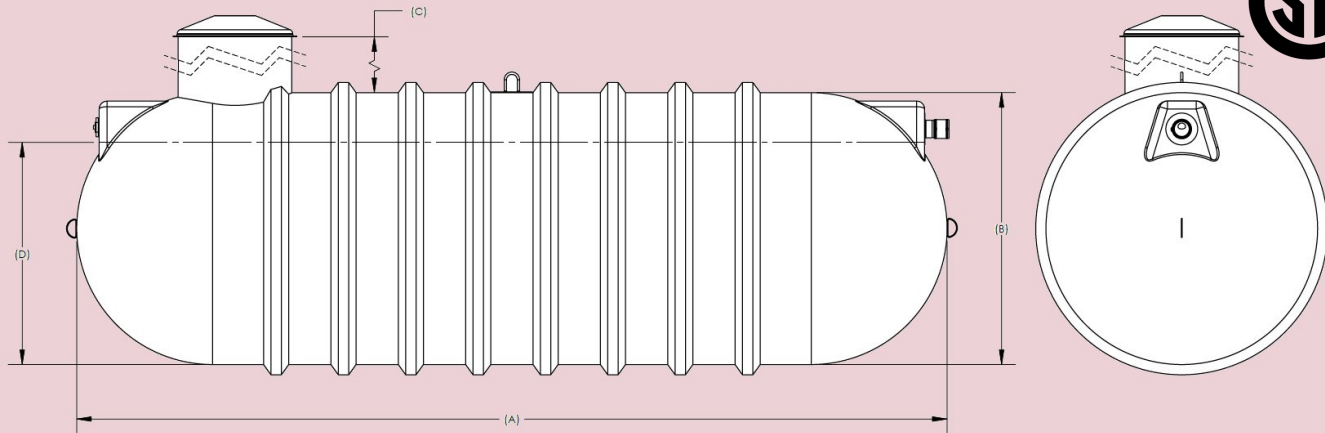


6-FT DIAMETER UNDERGROUND TANKS

Carlson's lineup of CSA-certified 6-ft (1.829 m) diameter underground tanks are versatile tanks available in a variety of styles such as holding, pump-out, trickle, siphon, or water. All tanks come with an easy-access 30" diameter manway and lid and designed for standard burial depths of 7' (2.14m) unless otherwise specified or requested. All tanks can be customized with a variety of options to fit your needs. Contact us for more details.

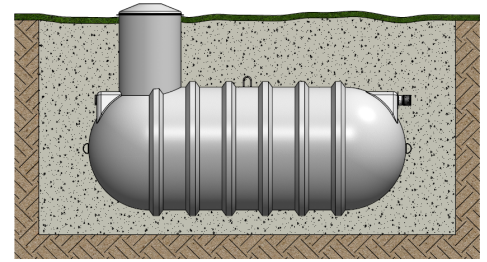

MODEL	TANK STYLE	MANWAY HEIGHT (C)	APPROX. WEIGHT	NOMINAL VOLUME	SEPTIC VOLUME	EFFLUENT VOLUME	TOTAL LENGTH (A)	DIAMETER (B)	MAX. LIQUID LEVEL (D)
		IN (MM)	LBS (KG)	IMP. GAL (L)	IMP. GAL (L)	IMP. GAL (L)	IN (MM)	IN (MM)	IN (MM)
CECPIL-2000IG-6H2.14	Holding	36 (914)	727 (330)	2000 (9092)	1829 (8314)	-	164.5 (4179)	72 (1829)	59 (1499)
CECPIL-2000IG-6P2.14	Pump Out	36 (914)	927 (420)		1428 (6491)	400 (1818)			
CECPIL-2000IG-6S2.14	Siphon	36 (914)	925 (420)		2064 (9383)	-			
CECPIL-2000IG-6T2.14	Trickle	36 (914)	926 (420)						
CECPIL-2000IG-6W.9	Water	36 (914)	643 (292)						
CECPIL-2000IG-6W2.14		36 (914)	828 (376)						
CECPIL-2500IG-6H2.14	Holding	36 (914)	1022 (464)	2500 (11360)	2266 (10301)	-	198.6 (5044)	72 (1829)	59 (1499)
CECPIL-2500IG-6P2.14	Pump Out	36 (914)	1116 (506)		1866 (8483)	401 (1822)			
CECPIL-2500IG-6S2.14	Siphon	36 (914)	1116 (506)		2563 (11651)	-			
CECPIL-2500IG-6T2.14	Trickle	36 (914)	1116 (506)						
CECPIL-2500IG-6W.9	Water	36 (914)	788 (357)						
CECPIL-2500IG-6W2.14		36 (914)	1017 (461)						
CECPIL-3000IG-6H2.14	Holding	36 (914)	1140 (517)	3000 (13638)	2704 (12299)	-	232.6 (5908)	72 (1829)	59 (1499)
CECPIL-3000IG-6P2.14	Pump Out	36 (914)	1234 (560)		2304 (10474)	400 (1818)			
CECPIL-3000IG-6S2.14	Siphon	36 (914)	1234 (560)		3062 (13920)	-			
CECPIL-3000IG-6T2.14	Trickle	36 (914)	1234 (560)						
CECPIL-3000IG-6W.9	Water	36 (914)	878 (398)						
CECPIL-3000IG-6W2.14		36 (914)	1136 (515)						