




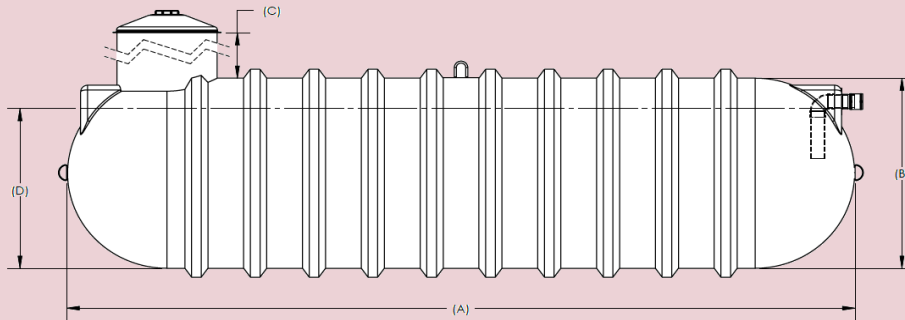

**ENGINEERED
COMPOSITES**

**5-FT DIAMETER
UNDERGROUND TANKS**

Carlson's lineup of CSA-approved 5-ft (1.524 m) diameter underground tanks are versatile tanks with a variety of volume capacities in a variety of styles such as holding, pump-out, trickle, or siphon. All tanks come with an easy-access 30" diameter manway and lid and are available for burial depths of 2' (0.6m), 7' (2.14m), and 10' (3.05m). All tanks can be customized with a variety of options to fit your needs. Contact us for more details.

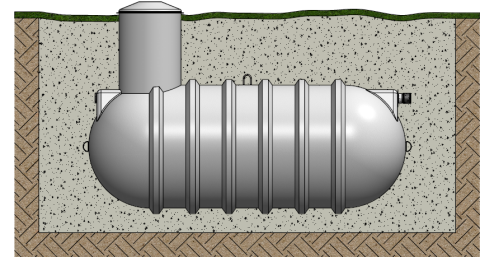

MODEL	TANK STYLE	MANWAY HEIGHT (C)	APPROX. WEIGHT	NOMINAL VOLUME	SEPTIC VOLUME	EFFLUENT VOLUME	TOTAL LENGTH (A)	DIAMETER (B)	MAX. LIQUID LEVEL (D)
		IN (MM)	LBS (KG)	IMP. GAL (L)	IMP. GAL (L)	IMP. GAL (L)	IN (MM)	IN (MM)	IN (MM)
CECPIL-1000IG-5H.6	Holding	24 (610)	322 (146)	1000 (4546)	916 (4163)	-	124.4 (3160)	60 (1524)	47.5 (1207)
CECPIL-1000IG-5H2.14		36 (914)	417 (189)						
CECPIL-1000IG-5H3.05		36 (914)	417 (189)						
CECPIL-1000IG-5P.6	Pump Out	24 (610)	390 (171)		916 (4163)	219 (995)			
CECPIL-1000IG-5P2.14		36 (914)	485 (220)						
CECPIL-1000IG-5P3.05		36 (914)	485 (220)						
CECPIL-1000IG-5T.6	Trickle	24 (610)	390 (171)	916 (4163)	219 (995)				
CECPIL-1000IG-5T2.14		36 (914)	485 (220)						
CECPIL-1250IG-5H.6	Holding	24 (610)	399 (181)	1250 (5682)	1107 (5032)	-	146.4 (3719)	60 (1524)	47.5 (1207)
CECPIL-1250IG-5H2.14		36 (914)	519 (235)						
CECPIL-1250IG-5P.6	Pump Out	24 (610)	467 (212)		864 (3927)	242 (1100)			
CECPIL-1250IG-5P2.14		36 (914)	587 (266)						
CECPIL-1250IG-5P3.05		36 (914)	587 (266)						
CECPIL-1250IG-5T.6	Trickle	24 (610)	467 (212)		864 (3927)	242 (1100)			
CECPIL-1250IG-5T2.14		36 (914)	587 (266)						
CECPIL-1500IG-5H.6	Holding	24 (610)	461 (209)	1500 (6820)	1366 (6210)	-	176.4 (4480)	60 (1524)	47.5 (1207)
CECPIL-1500IG-5H2.14		36 (914)	599 (272)						
CECPIL-1500IG-5H3.05		36 (914)	599 (272)						
CECPIL-1500IG-5P.6	Pump Out	24 (610)	529 (240)		1133 (5150)	233 (1059)			
CECPIL-1500IG-5P2.14		36 (914)	667 (303)						
CECPIL-1500IG-5P3.05		36 (914)	667 (303)						
CECPIL-1500IG-5T.6	Trickle	24 (610)	529 (240)	1133 (5150)	233 (1059)				
CECPIL-1500IG-5T2.14		36 (914)	667 (303)						
CECPIL-1750IG-5H.6	Holding	24 (610)	542 (246)	1750 (7955)	1570 (7137)	-	199.9 (5077)	60 (1524)	47.5 (1207)
CECPIL-1750IG-5H2.14		36 (914)	705 (320)						
CECPIL-1750IG-5P.6	Pump Out	24 (610)	609 (276)		1336 (6073)	234 (1063)			
CECPIL-1750IG-5P2.14		36 (914)	773 (351)						
CECPIL-1750IG-5P3.05		36 (914)	773 (351)						
CECPIL-1750IG-5T.6	Trickle	24 (610)	609 (276)		1336 (6073)	234 (1063)			
CECPIL-1750IG-5T2.14		36 (914)	773 (351)						
CECPIL-2000IG-5H.6	Holding	24 (610)	592 (269)	2000 (9092)	1782 (8101)	-	224.4 (5699)	60 (1524)	47.5 (1207)
CECPIL-2000IG-5H2.14		36 (914)	770 (349)						
CECPIL-2000IG-5H3.05		36 (914)	770 (349)						
CECPIL-2000IG-5P.6	Pump Out	24 (610)	660 (299)		1548 (7037)	233 (1059)			
CECPIL-2000IG-5P2.14		36 (914)	838 (380)						
CECPIL-2000IG-5P3.05		36 (914)	838 (380)						
CECPIL-2000IG-5T.6	Trickle	24 (610)	660 (299)	1548 (7037)	233 (1059)				
CECPIL-2000IG-5T2.14		36 (914)	838 (380)						